



# 3200

## STAINLESS STEEL WELDED FRAMED MIRROR



Brushed  
Steel



White  
Powder  
Coat



Black  
Powder  
Coat

Two stainless steel shelf options are available, 5" (127mm) deep, including: integral shelf or floating shelf with brackets for separate mounting below mirror



### WELDED FRAME

Frame is rigidly formed of 3/4" (19mm) X 5/8" (16mm) type 304, 18 gauge #4 stainless steel available in brushed steel, white or black powder coat finishes. All mitered corners are heliarc welded, ground smooth, and polished to #4 brush finish.

### MIRROR

No. 1 selected polished 5mm float glass with chemically deposited silver, electrolytically copper-plated followed by a heavy coating of tough elastic paint. Mirrors conforming to GSB 12-GD5A Type 1 B, and guaranteed against silver spoilage for a period of ten years.

### STOCK SIZES

Width	Height
18" (457mm)	24" (609mm)
18" (457mm)	30" (761mm)
18" (457mm)	36" (914mm)
24" (609mm)	30" (761mm)
24" (609mm)	36" (914mm)

### Custom Sizes Available

Weight: 5lbs /sq. ft. (NOT BOXED)

### GLAZING OPTIONS

- Acrylic Mirror
- Tempered Mirror
- Laminated Mirror
- Stainless Steel Mirror
- 6mm Mirror
- Shatter Stop Mirror Backing Tape


# 3200 STAINLESS STEEL WELDED FRAMED MIRROR

## FEATURES

No. 1 selected polished 5mm float glass with chemically deposited silver, electrolytically copper-plated followed by a heavy coating of tough elastic paint. Mirrors conforming to GSB 12-GD5A Type B, and guaranteed against silver spoilage for a period of ten years.



Mirrors to be taped, siliconed, suspension glazed with PVC blocks to have a minimum 3/8" (10mm) back free air space.

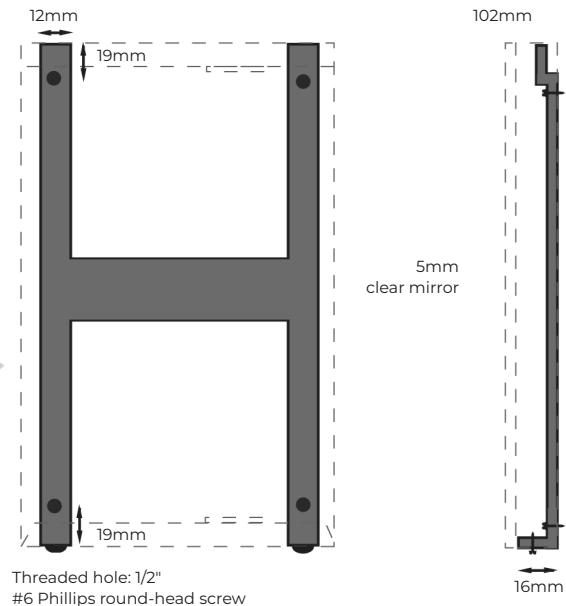

Newly designed wall hanger (H bracket) formed of two verticals, 1/2" (12mm) 16 gauge satin coat steel and one horizontal, 1 1/2" (38mm) 24 gauge steel spot welded together. Fully conceals mechanical fixings ensuring a vandal resistant secure wall mounting.

## INSTRUCTIONS

**1** Screw H bracket to wall.



**2** Place top of mirror frame over top tabs of H bracket.



**3** Screw bottom H bracket screws up until mirror frame fits over screws. Insert thin screwdriver up through bottom holes in mirror frame and back H bracket, screw down until tight.

