



**SECURITY MIRROR
INDUSTRIES LIMITED**

**ADJUSTABLE TILT
STAINLESS STEEL ANGLE FRAMED MIRROR
SERIES**

3200

ADJUSTABLE
TILT

ANGLE FRAME

Frame is rigidly formed of 3/4" (19mm) X 5/8" (16mm) type 304, 18 gauge #4 brush finished stainless steel. All mitered corners are heliarc welded, ground smooth, and polished to #4 brush finish.

MIRROR

No.1 selected polished 5mm float glass with chemically deposited silver, electrolytically copper plated followed by a heavy coating of tough elastic paint. Mirrors conforming to GSB 12-GD5A Type B, and guaranteed against silver spoilage for a period of ten years.

STOCK SIZES*


Width	Height
16" (406mm)	24" (609mm)
16" (406mm)	30" (761mm)
18" (457mm)	24" (609mm)
18" (457mm)	30" (761mm)
18" (457mm)	36" (914mm)
24" (609mm)	30" (761mm)
24" (609mm)	36" (914mm)

* Custom Sizes Available

Weight: 5 lbs / sq. ft (NOT BOXED)

GLAZING OPTIONS

- Acrylic Mirror
- Tempered Mirror
- Laminated Mirror
- Stainless Steel Mirror
- 6mm Mirror

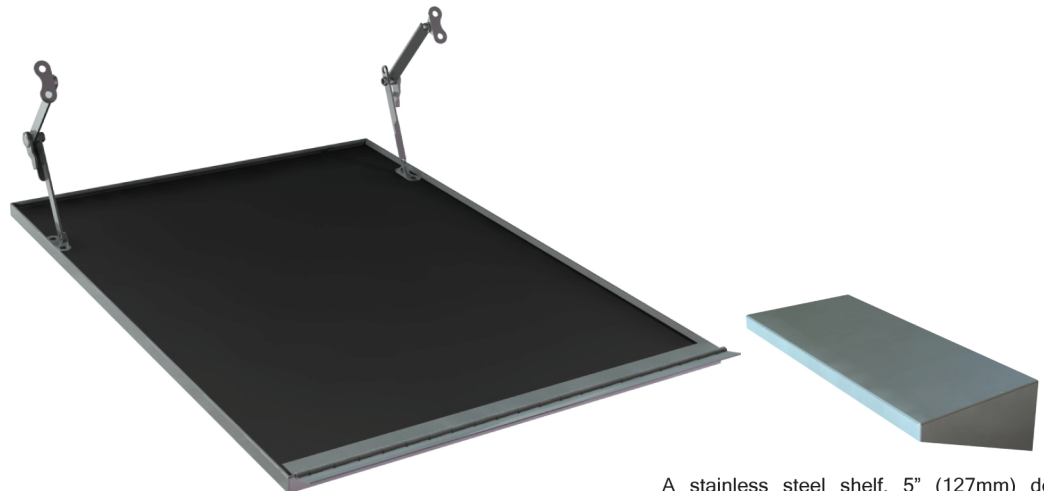

*BACK

A stainless steel shelf, 5" (127mm) deep, welded and polished is available for separate mounting below all mirrors.



**SECURITY MIRROR
INDUSTRIES LIMITED**

**ADJUSTABLE TILT
STAINLESS STEEL ANGLE FRAMED MIRROR
SERIES**

3200

ADJUSTABLE
TILT

FEATURES


No.1 selected polished 5mm float glass with chemically deposited silver, electrolytically copper plated followed by a heavy coating of tough elastic paint. Mirrors conforming to GSB 12-GD5A Type B, and guaranteed against silver spoilage for a period of ten years.



Mirrors to be taped, siliconed, suspension glazed with PVC blocks to have a minimum 3/8" (10mm) back free air space.




Adjustable arms have 'right' or 'left' stamped on them. Mount them so that the elbow nut points in.




Piano Hinge




INSTRUCTIONS

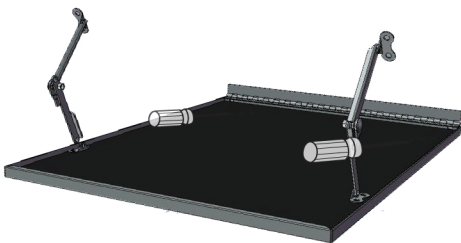

1. Drill hole through piano hinge and wall. Put plugs in wall and mount mirror. Turn mirror upright and mark. Do the same with 2nd hole; mark on wall then drill and plug.

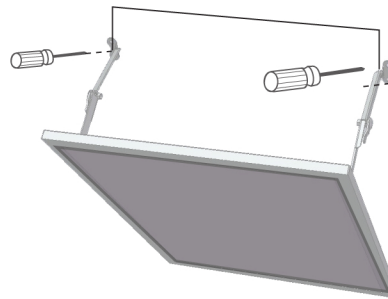

2. Take distance from top of mirror to centre of hole (top). Do the same with 2nd hole mark on wall, drill and plug. Mark on wall, drill and plug.



3. Take adjustable piano hinge apart at elbow and mount to wall. Stand mirror up and re-assemble elbow.